

PRODUCTIVITY SOLUTIONS™ BY GLOBAL

	MANUAL HEIGHT ADJUSTABLE TABLES™
OVERVIEW:	 Height Adjustable Tables[™] with counterbalanced spring mechanism. Manually operated. Sit-stand design promotes increased circulation, improving performance and comfort. Can be used alone or in conjunction with Global desks. Meets ANSI/BIFMA requirements.
FINISHES:	Top Colours
	Absolute Acajou (ACJ)Quartered Mahogany (QTM)Asian Night (ASN)Shaker Cherry (SKC)Avant Cherry (AWC)Storm Grey (SOG)Avant Honey (AWH)Tiger Fruitwood (TFW)Black (BLK)Tiger Mahogany (TMA)Brushed Cobalt (BRC)Tiger Maple (TMP)Constellation Java (CSJ)Tiger Walnut (TWL)Dark Espresso (DES)White (WHT)Grey (GRY)White Chocolate (WHC)Hayden Gray (HGT)Winter Cherry (WCR)Willow Grey (WGY)Kenter Cherry (WCR)
EDGE:	3mm thick. Matching to top colour.
TOPS:	 1" thick tops constructed of 45 pound density particle board covered on both sides with thermally fused laminates
BASE:	 Heavy duty, steel formed legs with radius detail are available in BLACK only. Paddled activated, counterbalanced spring mechanism locks in infinite positions between 26" and 46"h. Easy to reach tension control supports loads up to 100 lbs. Environmentally friendly, recyclable epoxy powder coating provides a very durable finish. Black plastic levelling glides offer 1/2" adjustability.
DIMENSIONS:	 Top width sizes shown are nominal - actual dimension is reduced by 2" in width. When designing workstations, leave 1" clearance on either side to prevent finger pinch.
MECHANISM:	 Counterbalanced height adjustable base supports weight up to 100 lbs. Clearance from floor to underside of modesty shroud is 17" when surface height is at 26" H. Warranty 7 years.
SHIPPING:	 Shipped R.T.A (Ready to Assemble) in two cartons. Easy to assemble with Philips or Robertson screwdriver.
OPTION:	 Black wire management grommet (FOG1, FOG2, FOG3) can be ordered and factory installed onto the following tables: HTM3058, HTM3046, HTM2458, HTM2446Add \$ 65.00

Description	Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option
Manual Height Adjustable Tab	es™								
~	□ HTM305 В HTM304	8 58	30	26 -46	144	7.16	\$1494		Add \$100
	^{ଲି} HTM304	6 46	30	26 -46	133	6.08	\$1453		Add \$75
	□ HTM245 "₹ HTM244	8 58	24	26 -46	133	7	\$1453		Add \$84
	₹ НТМ244	6 46	24	26 -46	124	6.5	\$1432		Add \$50
Rectangular Table									

Rectangular Table

Paddle activated height adjustable base. Height adjustment from 26" to 46". Keyboard tray and mechanism not necessary.

Required Specifications	Optional Specifications	Accessories available
Finish	HP Laminate	
	Grommet	

global


PRODUCTIVITY SOLUTIONS™ BY GLOBAL

ELECTRIC HEIGHT ADJUSTABLE TABLES

OVERVIEW:	 Electric Height Adjustable Tables with easy to use, push button adjustment. Sit-stand design promotes increased circulation, improving performance and comfort. Can be used alone or in conjunction with Global desks and workstations. Meets ANSI/BIFMA requirements.
FINISHES:	Top Colours
	Absolute AcajouACJAsian NightASNAvant CherryAWCAvant HoneyAWHBlackBLKBrushed CobaltBRCConstellation JavaCSJDark EspressoDESGreyGRYHayden GrayHGTQuartered MahoganyQTMShaker CherrySKCStorm GreySOGTiger FruitwoodTFWTiger MahoganyTMATiger MahoganyTMATiger MahoganyTMPTiger MahoganyTMPTiger MahoganyTMPWhiteWHTWhite ChocolateWHCWinter CherryWCRWillow GreyWGY
EDGE:	3mm thick matching to top colour.
TOPS:	 1" thick tops constructed of 45 pounds density particle board covered on both sides with thermally fused laminate. Tops are undersized by 1" on both sides and the back edge. Example: a 72"w x 24"d Height Adjustable Table will actually be 70"w x 23"d. This minimizes potential pinch points.
BASE:	 Steel constructed leg tubing, feet and cross bar. Table frame designed with 3.15" x 2.35" rectangular outer leg with large tubing facing down. "T" leg, flat foot design with adjustable glides. Expandable cross bars for table widths of 48", 54", 60", 66" and 72". Silver powder coated base finish. Easy to use, push button adjustment.
GROMMET SPECIFICATIONS:	 Additional grommets available in standard worksurface locations (<i>left, centre, or right</i>). Order as FOG1, FOG2 or FOG3. Add \$ 65.00. Grommet hole dimensions are 3 1/4" wide x 1 7/8" deep. CSG (Customer Specified Grommet). Add \$ 93.00.
	FOG1 FOG2 FOG3
WOOD GRAIN:	Laminate direction
SHIPPING:	Shipped unassembled.
WARRANTY:	 Steel components are warranted for ten (10) years, five (5) years on moving components and two (2) years on all electrical components. Limited lifetime for laminate worksurface.

global

983

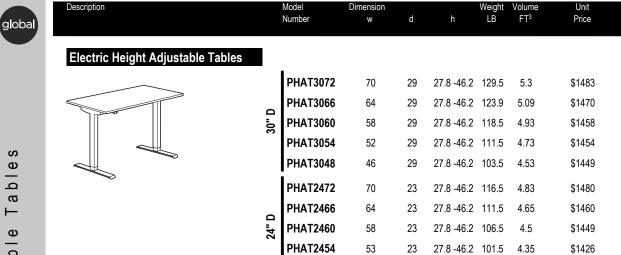

PHAT2448

Model

Foli - Electric Height Adjustable Table

All table frames are easy to assemble with few parts. Simple up/ down hand switch. Lifts 220 pounds. Base manufactured so that leg paint will never mark during height adjustment. Leg assembly tubing, feet and upper structure assemblies constructed of steel. Table frame designed with 3.15" x 2.36" rectangular outer leg with the large tube facing down. Flat foot design with adjustable glides. I-profile crossbars that are expandable in fixed steps to create a variety of size table widths. Height range 27.8" to 46.2" (18.4" adjustability). Single motor hex rod drive system. Operates at 1" per second. Shadow power draw 0.5 watt. Base finish, Silver powder coat only.

Required Specifications	Optional Specifications	Accessories available
Finish	HP Laminate	

4.23

27.8 - 46.2 94.5

P79100014 1.5 2 0.4

23

46

\$82

\$1412

Glazed

MP/Door

Option

Laminate

Option

Add \$137

Add \$136

Add \$135

Add \$135

Add \$134

Add \$137

Add \$135

Add \$134

Add \$132

Add \$131



1 1/2" Dual Wheel Casters

Pack of four casters, two locking and two non-locking. Interchangeable with levelers on Foli height adjustable tables PHAT#### models.

	Number	W	d	h	Weight LB	Volume FT ³		azed HP Door Laminate tion Option	glo
Ionitor Arms									
	ASE SPECIFY all subs	titutions an	d option:	s					
Attach to any	ble space on surface. standard surface with flu	sh edge by a	a desk cla	amp, thre	ough a gro	ommet or thr	ough a custom-drille	ed 5/8" hole.	
 9" vertical height 	lware included. ght adjustment on 12" po								
	e up to 21" flat panel mor justable monitor arms su		28 lb moi	nitors.					
 Height adjusta Built-in cable r 	ble monitor arms suppo management.	rt up to 20 lb	monitors	S.					
Monitor arm cAvailable finis	t option is standard with omponents are 100% re hes: Silver (SIL) standar FMA requirements.	cycled alumi	inum die	cast mat	erial, prov	iding stability	y and durability.	standards.	
	MON1SPP	-	-	13	5.8	1.2	\$196		
Finale Serren Bala Decition									
ingle Screen Pole Position o extension arms. Minor assembly re	quired.	Requ i Finish	ired Specifi	cations	Optional	Specifications	Accessories available	_	
	MON1SSE								
ingle Screen Single Extension Arm		_							
-1/2" horizontal reach from centre of p nounting plate. Displays tilt 180°, swin ptate from landscape to portrait. Minor	g 180° side-to-side and	Finish	ired Specifi	cations	Optional	Specifications	Accessories available	_	
No.	MON1SSEF	1 -	-	13	7.2	1.1	\$338		
Single Screen Single Extension with		Requi	ired Specifi	cations	Optional	Specifications	Accessories available		
counterbalanced arm provides an add djustment. asy-to-use Allen wrench allows user t nechanism for easy movement of the -1/2" horizontal reach from centre of p nounting plate.	o adjust the counterbalar monitor.	Finish				specifications		_	

Description	Model [Number	Dimension W	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Lamin Optic
Monitor Arms									
	MON1SDE		-	13 -24	7.5	1.2	\$330		
Single Screen Double Extension Double extension allows 19" of horizontal ba	ack and forth movement	Requi	red Specif	ications	Optional	Specifications	Accessories	available	
Arm folds back to post for more desk space		Finish							
Displays are able to tilt 180°, swing 180° s from landscape to portrait. Minor assembly required.									
	MON1SDEH	29.3	9.5	6.8 -24	8.2	1.1	\$397		
Single Screen Double Extension with H Counterbalanced arm provides an addition adjustment. Double extension arm provides 19" of hori movement.	nal 13" of height	Requi Finish	red Specif	ications	Optional	Specifications	Accessories	available	
Easy-to-use Allen wrench allows user to ad mechanism for easy movement of the mor Displays tilt 180 degrees, swing 180 degree from landscape to portrait. Cable manager comes on extension arm a Minor assembly required.	nitor. es side-to-side and rotate								
	MON2SDE		-	12.38	10.7	1.2	\$584		
→≪J Dual Screen Double Extension Arm									
For dual monitor applications. Double exte	ension arm provides 19"		red Specif	ications	Optional	Specifications	Accessories	available	
of horizontal back and forth movement. Easy-to-use Allen wrench allows user to ad mechanism for easy movement of the mor Displays tilt 180°, swing 180° side-to-side	djust the counterbalance	Finish							

Description Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option	global
Monitor Arms MON2SD	EH -	-	12.38	6	1.2	\$725			
Dual Screen Double Extension with Height Adjustment For dual monitor applications. Counterbalanced arms provide an additional 13" of height adjustment. Double extension arms provide 19" of horizontal back and for movement. Easy-to-use Allen wrench allows user to adjust the counterbal mechanism for easy movement of the monitor. Displays can tilt 180°, swing 180° side-to-side and rotate fro landscape to portrait. Cable manager comes on extension arm and hides all cable	Finis orth alance m	uired Specif h	ications	_ Optional	Specifications	_ <u>Accessories avai</u>	lable		Monitor Arms
Minor assembly required.	BM 63.86	9.69	17.6	18.3	0.7	\$948			
Parabolic Quad Screen Beam Mount Supports four monitors. Two outside single extension arms tilt 180° and swing 180° to-side. All displays can be rotated from landscape to portrai Beam is 63.9" w. Recommend mounted through grommet or Minor assembly required.	side- ^{Finis} t.	uired Specif	ications	Optional	Specifications	_ Accessories avai	lable		

global	Description Model D Number	imension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option
•	Keyboard Trays with Mouse Supports POBUSTRAY	15.75	26.5	3	7.2	0.43	\$130		
oard Supports	OBUSforme® Tray Floating Mouse Tray® slides over numeric keys and can be easily positioned to the left or right of keyboard. Height Adjustable Palm Rest® can be easily positioned on left or right side of tray to accommodate mouse position, also can be removed by the user. Tray is 25"w x 12"d. Includes anti-slip strips. ABS construction.								
Keyb	Compatible with all Global keyboard mechanisms. KT01 Tray with Sliding Mouse Support Mouse surface slides below support for left or right mouse positioning. Keyboard surface is 21"w x 11"d. Mouse surface extends 9" beyond the side of tray. Compatible with all Global keyboard mechanisms.	21.3	10.5	2	7	0.4	\$160		
Z	KT27M02 27" HDPE Tray Allows mouse to be easily positioned at the same height as, and to the left or right of, the keyboard. Palm rest is easily removable. Includes mouse fence with cable manager to secure the mouse when the tray is tilted. Tray is 27" w x 11"d. Includes anti-slip strips.	27.5	11.5	1	6	0.4	\$206		
al CDN	High density polyethylene (HDPE) construction. Compatible with all Global keyboard mechanisms.								

Description	Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option	global
Keyboard Trays with Mouse Supports	Lummaa									
	(КТМТОЗ	23	11.5	2.8	5.8	0.6	\$222			ts

Tray with Height Adjustable Mouse Support

Low profile tray with highly adjustable mouse support that allows user to position mouse surface according to their needs and preferences. Mouse support features include: height adjustment, swivel and tilt. User can easily mount on left or right side of keyboard tray, easily swivel and adjust the height position to maintain neutral postures, and independently adjust the mouse surface tilt so mouse stays on the support when the keyboard tray is tilted. Compatible with all Global keyboard mechanisms. Palm rest is

easily removable.

Includes mouse fence with cable manager and anti-slip strips. Keyboard tray is 20.5 "w x 11"d and mouse support is 11" in diameter.

Phenolic construction.

i	РКВТ-27	-	-	-	10.5	0.4	\$194
	PKBT-27A	-	-	-	11	1.45	\$227

Retractable Keyboard

PKBT-27 - Retractable Keyboard.

PKBT-27A - Retractable Keyboard - Assembled.

Keyboard Mechanisms

9	23.8	4.3	9.2	0.7	\$159
7.4	19.7	3.6	7.6	0.6	\$159
5	13.1	2.4	5.1	0.4	\$159
	7.4	7.4 19.7	7.4 19.7 3.6	7.4 19.7 3.6 7.6	7.4 19.7 3.6 7.6 0.6

Optional Specifications Accessories available

Lockout

Height range taken

-15° Level 0°

 $+10^{\circ}$

Trave

Soft Touch Keyboard Support Mechanism

Soft touch knob for simultaneous height and tilt adjustment. Springassist mechanism. Swivels 360°. Optional positive tilt lockout available. Add "L" to model number e.g. KSM01-21-L, KSM01-18-L, KSM01-12-L. The "-21" models require 21.75" of depth clearance under the surface for installation. The "-18" models require 18" of depth clearance and the "-12" models require 12" of depth clearance.

Compatible with all Global keyboard trays.

Good value for single users who do not adjust their keyboard often.


o d

Supr

eyboard

 \mathbf{x}

Productivity Solutions™ by Global CDN



glob

bal	Description	Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option
	Keyboard Mechanisms									
		KSM02-21	9	23.8	9.7	9.7	0.7	\$208		
		KSM02-18	7.4	19.7	8.2	8	0.6	\$208		
		KSM02-12	5	13.1	5.4	5.4	0.4	\$208		

2.25" Height range taken from top of track Range -6.13" -15° level 0°

Lift-N-Lock Keyboard Support Mechanism

Knob-less height adjustment and independent tilt adjustment. Locks automatically into position with release of tray. Positive tilt lockout available. Swivels 360°.

The "-21" models require 21.75" of depth clearance under the surface for installation.

The "-18" models require 18" of depth clearance and the "-12" models require 12" of depth clearance.

Compatible with all Global keyboard trays.

Better value for single users who frequently change positions and for multiple users.

KSFK-21	5	13.1	5.4	9	0.6	\$208
KSFK-18	5	13.1	5.4	8.3	0.5	\$208
KSFK-12	5	13.1	5.4	7.3	0.5	\$208

2.38[°] Height range taken from top of track ^{0°} Height 6.50[°] range

+10

Slim Fit Keyboard Support Mechanism

Super slim profile accommodates leg clearance requirements of more users. Knob-less height adjustment and independent tilt adjustment. Positive tilt lockout available. Swivels 360°. **The "-21" models require 21.75" of depth clearance under the**

surface for installation. The "-18" models require 18" of depth clearance and the "-12" models require 12" of depth clearance.

Height and depth indicators together in dashboard. Compatible with all Global keyboard trays.

Best value for single users who frequently change positions and for multiple users.

Description	Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option	global
Keyboard Mechanisms										
Fran	KSM03-21	9	23.8	9.7	11.8	0.9	\$336			
	KSM03-18	7.4	19.7	8	9.7	0.7	\$336			
	KSM03-12	5	13.1	5.3	6.5	0.5	\$336			
+.8.25° Height rom top of track Range 5.88° -15° level 0° +10° 15° Lift-N-Lock Sit-Stand Mechanism Ergonomic support for both seated and stand neck allows user closer access to the desk. K adjustment and independent tilt adjustment. F available. Swivels 360°. The "-21" models require 21.75" of depth of surface for installation. The "-18" models require 18" of depth clear	Knob-less height Positive tilt lockout clearance under t	he								Keyboard Supports
models require 12" of depth clearance. Compatible with all Global keyboard trays.		I E								
Highly recommended for single users to alter	nate between sittir	ng								

and standing.

Keyboard Support Packages

Keyboard Support Packages are also available. A package consists of a Keyboard Tray with Mouse Support, Keyboard Mechanism and a glide track (21.75", 18" or 12" long). Note that package codes that include the 21.75" glide track are in **bold**.

The 21.75" glide track requires 21.75" of depth clearance under the surface for installation.

Packages are also available for the 18" and 12" tracks. PLEASE contact your customer service representative for package codes.

Keyboard Support Packages

	POBUSTRAY	KT01	KT27M02	KTMT03
KSM01-21	KP01TR	KP0101	KP0102	KP0103
	\$ 289.00	\$ 319.00	\$ 365.00	\$ 381.00
KSM02-21	KP02TR	KP0201	KP0202	KP0203
	\$ 338.00	\$ 368.00	\$ 414.00	\$ 430.00
KSFK-21	KPSFTR	KPSF01	KPSF02	KPSF03
	\$ 338.00	\$ 368.00	\$ 414.00	\$ 430.00
KSM03-21	KP03TR	KP0301	KP0302	KP0303
	\$ 466.00	\$ 496.00	\$ 542.00	\$ 558.00



	Number	W	d	h	LB	Volume FT ³	Price	MP/Door Option	La (
CPU Holders									
	РСРИ-НС	5	15	10.37	8	0.45	\$111		
CPU Holder on Casters Adjusts 5" - 9" in width. Front locking caster included. Height without CPU is 10.4". Dept Black only.									
Power Park CPU Holder	РСРИ-НО	5	15	18	11.5	1	\$92		
Desk mounted CPU holder. Adjusts 5" - 9" i hardware included. Height without CPU is 1 is 15". Black only.	8". Depth without CPU								
	PCPU-GT	3.5	9.3	13.5	12.6	1.4	\$210		
CPU Holder on Glide Track Accepts tower CPUs with widths from 3.5" to 22.5". 12" glide track and 360° swivel for easy acc	-								
Steel and engineered resin construction. Laptop Stands	POBSMONST	18	20.5	2.25	11.4	0.44	\$154		
OBUSforme® Laptop Stand Supports laptops or monitors. Height adjust Platform is 14"w x 16.3"d. Removable in lin Supports letter or legal size document.									

Laptop Stand

5 angle adjustments. 4 port USB hub. Plug-and-play installation; no drivers required. 13"w x 10"d. Easy to store and pack for travel, fits into most computer bags. Two-tone Black/Grey only.

Description	Model E Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed HP MP/Door Laminate Option Option	global
Laptop Stands	PNT30	26	15.25	24	17	1.6	\$194		
Laptop Desk Height adjustable from 24" to 29". Surface is a palm rest. Can be used for keyboards. Loo levelling glides. Top is 24"w x 13.5"d. Top su Granite (GPT).	cking casters and	l .							ccessories
Document Holders	PDHC200	16	8	10	4.3	0.3	\$98		Ergo A
adjustable. 16.6"w x 9.9"d. Black (BLK) only		15.5	11.5	2.5	0.2	0.3	\$86		
In Line Document Holder Supports letter or legal size documents. Use Available in Black (BLK) or Silver (SIL).	e with monitor arms.								
Rests OBUSforme® Footrest	POBUSFOTR	16	20	3.6	7	4.9	\$107		by Global CDN
3 adjustable positions 5° to 15°. Sturdy sup 18"w x 14"d. Two-tone Black/Grey only.	port, non-skid surface.								vity Solutions™ by Global CDN

oal	Description	Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option
	Lighting									
		PVET5L48	48	4.25	1.25	8	0.28	\$110		
		PVET5L36	36	4.25	1.25	6.5	0.21	\$100		
		PVET5L24	24	4.25	1.25	5	0.15	\$93		
		PVET5L18	19.5	4.25	1.25	4.5	0.12	\$88		
	Task Light									
	T5 rapid start florescent lamp provides energ Slim low profile metal chassis. Electronic bal									

T5 rapid start florescent lamp provides energy efficient illumination. Slim low profile metal chassis. Electronic ballast. Prismatic acrylic lens included. Attaches to wood or metal units. Specify 6" shorter than storage unit width. All models are 4.3"d x 1.3"h. 9' Black cord.

PCSN01

Power and Data

6	,
ß	Í
A	1
R	
q	De la

Cabl	e S	nake

Flexible cable management. Provides access to power/data from floor to underside of worksurface where it attaches. Two pathways within cable snake. Length under the desk is 31 ¼". Silver (SIL) only.



(-)-]						
PEWM5.5	66	2	2	0.6	0.1	\$101
PEWM5	60	2	2	0.6	0.1	\$85
PEWM4.5	54	2	2	0.5	0.1	\$77
PEWM4	48	2	2	0.5	0.1	\$67
PEWM3.5	42	2	2	0.4	0.1	\$60
PEWM3	36	2	2	0.4	0.1	\$51
PEWM2.5	30	2	2	0.3	0.1	\$42
PEWM2	24	2	2	0.3	0.1	\$35
PEWM1.5	18	2	2	0.2	0.1	\$26
PEWM1	12	2	2	0.2	0.1	\$18

2.1

0.2


\$86

Wire Manager

2"w x 2"h plastic tray flexes to receive and then hold electrical and

data wires. Quickly attaches with two strips two sided tape. Black (BLK) only.

PEVWM	22	2	2	0.3	0.1	\$35
-------	----	---	---	-----	-----	------



Vertical Wire Manager

From underside of worksurface to bottom panel. Capable of holding electrical and data wires in a vertical position. 2"w x 2"d x 22"h. Black (BLK) only.

glob

Description	Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option	global
Power and Data										
	PS305057	5.5	3.2	3	3	0.05	\$400			
	PS305002	5.5	3.2	3	3	0.05	\$400			S
Edge Mounted 2 Power/USB										U O
Edge mounted power module with two powe amp USB ports. Edge clamp accommodates 1.5" thick; fastened with thumb screws. PS305057 - White module with Silver bracke PS305002 - Black module with Silver bracke	work surfaces 0.5" t et.									er Solutio
	PS305157	5.5	2.8	1.8	3.2	0.05	\$350			≥
	PS305102	5.5	2.8	1.8	3.2	0.05	\$350			Ро
	-									
Under Mounted 2 Power/USB										
Under mount power module with two power or USB ports. Mountable under most work surfa template provided. PS305157 - White module with Silver bracke PS305102 - Black module with Silver bracke	aces. Installation	p ·								
	PEUTEM	3.8	3	2	1	0.18	\$119			
Mini Adapt Power Module										
Two power receptacles. Attaches to edge of grommet hole. 6' Black cord. 3.8"w x 3"d x 2'										
	PEUTDM	3.75	3	2	2	0.18	\$96			ons™ by Global CDN
Mini-Adapt Data Module										N N
Spaces for two data outlets with adaptors. Da Attaches to edge of table or desk through gro cord. 3.8"w x 3"d x 2"h. Black (BLK) only.										ns™ b
										0



escription		Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	La (
Power and Data										
		PEUEDM	6.5	4	2.5	2	0.18	\$204		
Dete Medule										
ower/Data Module onsisting of two electrical outlets, sp laptors. Data plugs not provided. 6'			th [.]							
5"h. Black only.	-	PLECHUB	4.25	4.25	4.75	2	0.25	\$408		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl		l two data outlet	S.							
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl		I two data outlet	s. 72	<u>-</u>		3.2	0.1	\$125		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System		•		-	-	3.2	0.1 0.09	\$125 \$120		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System		PP42SO721	72 66	-	-	3	0.09	\$120		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	ly.	PP42SO721 PP42SO661 PP42SO601	72 66 60		-		0.09 0.09	\$120 \$115		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	ly.	PP42SO721 PP42SO661 PP42SO601 PP42SO541	72 66 60 54	-		3 2.8	0.09 0.09 0.08	\$120 \$115 \$110		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl		PP42SO721 PP42SO661 PP42SO601 PP42SO541 PP42SO481	72 66 60 54 48	-	-	3 2.8 2.6 2.4	0.09 0.09 0.08 0.08	\$120 \$115 \$110 \$105		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	ly.	PP42SO721 PP42SO661 PP42SO601 PP42SO541 PP42SO481 PP42SO421	72 66 60 54 48 42	-	-	3 2.8 2.6 2.4 2.3	0.09 0.09 0.08 0.08 0.07	\$120 \$115 \$110 \$105 \$100		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	ly.	PP42SO721 PP42SO661 PP42SO501 PP42SO541 PP42SO481 PP42SO421 PP42SO361	72 66 60 54 48 42 36	-	- -	3 2.8 2.6 2.4 2.3 2.1	0.09 0.09 0.08 0.08 0.07 0.06	\$120 \$115 \$110 \$105 \$100 \$95		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	ly.	PP42SO721 PP42SO661 PP42SO601 PP42SO541 PP42SO481 PP42SO421 PP42SO361 PP42SO301	72 66 60 54 48 42 36 30	-	- - -	3 2.8 2.6 2.4 2.3 2.1 1.9	0.09 0.09 0.08 0.08 0.07 0.06 0.06	\$120 \$115 \$110 \$105 \$100 \$95 \$90		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	ly.	PP42SO721 PP42SO661 PP42SO541 PP42SO481 PP42SO421 PP42SO361 PP42SO301 PP42SO241	72 66 60 54 48 42 36 30 24	- - - -	- - - -	3 2.8 2.6 2.4 2.3 2.1 1.9 1.7	0.09 0.09 0.08 0.08 0.07 0.06 0.06 0.05	\$120 \$115 \$110 \$105 \$100 \$95 \$90 \$82		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	ly.	PP42SO721 PP42SO661 PP42SO541 PP42SO481 PP42SO421 PP42SO301 PP42SO301 PP42SO241 PP42SO722	72 66 60 54 48 42 36 30 24 72	- - - -		3 2.8 2.6 2.4 2.3 2.1 1.9 1.7 3.2	0.09 0.08 0.08 0.07 0.06 0.06 0.05 0.1	\$120 \$115 \$110 \$105 \$100 \$95 \$90 \$82 \$125		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	ly.	PP42SO721 PP42SO661 PP42SO601 PP42SO481 PP42SO481 PP42SO361 PP42SO301 PP42SO241 PP42SO241 PP42SO722 PP42SO662	72 66 60 54 48 42 36 30 24 72 66	- - - -		3 2.8 2.6 2.4 2.3 2.1 1.9 1.7 3.2 3	0.09 0.08 0.08 0.07 0.06 0.06 0.05 0.1 0.09	\$120 \$115 \$110 \$105 \$100 \$95 \$90 \$82 \$125 \$120		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	.∢I Circuit 1	PP42SO721 PP42SO661 PP42SO541 PP42SO421 PP42SO421 PP42SO301 PP42SO301 PP42SO722 PP42SO662 PP42SO602	72 66 60 54 48 42 36 30 24 72 66 60	- - - -		3 2.8 2.6 2.4 2.3 2.1 1.9 1.7 3.2 3 2.8	0.09 0.08 0.08 0.07 0.06 0.06 0.05 0.1 0.09 0.09	\$120 \$115 \$110 \$105 \$100 \$95 \$90 \$82 \$125 \$120 \$115		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	.∢I Circuit 1	PP42SO721 PP42SO661 PP42SO601 PP42SO541 PP42SO481 PP42SO361 PP42SO301 PP42SO241 PP42SO722 PP42SO662 PP42SO662 PP42SO602	72 66 60 54 48 42 36 30 24 72 66 60 54	- - - -		3 2.8 2.6 2.4 2.3 2.1 1.9 1.7 3.2 3 2.8 2.6	0.09 0.08 0.08 0.07 0.06 0.06 0.05 0.1 0.09 0.09 0.08	\$120 \$115 \$110 \$105 \$100 \$95 \$90 \$82 \$125 \$120 \$112 \$110		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	.∢I Circuit 1	PP42SO721 PP42SO661 PP42SO541 PP42SO421 PP42SO421 PP42SO301 PP42SO301 PP42SO722 PP42SO662 PP42SO662 PP42SO542 PP42SO542	72 66 60 54 48 42 36 30 24 72 66 60 54 48	- - - -		3 2.8 2.6 2.4 2.3 2.1 1.9 1.7 3.2 3 2.8 2.6 2.4	0.09 0.08 0.08 0.07 0.06 0.06 0.05 0.1 0.09 0.09 0.08 0.08	\$120 \$115 \$110 \$105 \$100 \$95 \$90 \$82 \$125 \$120 \$115 \$110 \$105		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	ly.	PP42SO721 PP42SO661 PP42SO601 PP42SO541 PP42SO421 PP42SO361 PP42SO301 PP42SO241 PP42SO722 PP42SO662 PP42SO662 PP42SO622 PP42SO542 PP42SO422	72 66 60 54 48 42 36 30 24 72 66 60 54 48 42	- - - -		3 2.8 2.6 2.4 2.3 2.1 1.9 1.7 3.2 3 2.8 2.6 2.4 2.3	0.09 0.08 0.08 0.07 0.06 0.06 0.05 0.1 0.09 0.09 0.08 0.08 0.07	\$120 \$115 \$110 \$105 \$100 \$95 \$90 \$82 \$125 \$120 \$115 \$110 \$105 \$100		
ectrical/Communication Hub rcular unit composed of two electrica 3"w x 4.3"d x 4.8"h. Black (BLK) onl -Wire Power System	.∢I Circuit 1	PP42SO721 PP42SO661 PP42SO541 PP42SO421 PP42SO421 PP42SO301 PP42SO301 PP42SO722 PP42SO662 PP42SO662 PP42SO542 PP42SO542	72 66 60 54 48 42 36 30 24 72 66 60 54 48	- - - -		3 2.8 2.6 2.4 2.3 2.1 1.9 1.7 3.2 3 2.8 2.6 2.4	0.09 0.08 0.08 0.07 0.06 0.06 0.05 0.1 0.09 0.09 0.08 0.08	\$120 \$115 \$110 \$105 \$100 \$95 \$90 \$82 \$125 \$120 \$115 \$110 \$105		

Single Duplex Kit

Single duplex kit includes one Black plastic duplex connected to harnesses. Male connection (IN) on one side with female connection (OUT) on the opposite for easy connect and disconnect. Conduit is wrapped in Black nylon sleeve. Actual length is 1" longer than nominal. Specify Circuit 1 or Circuit 2.

Ideal for use with Bungee SL power / data management troughs; model # corresponds to the size of power / data management trough will fit on (i.e. P42S-48 will fit a JB48A, JB48L or JB48C module). Infeed required for connection to building power. Sold separately.

PP42SO601	60	-	-	2.8	0.09	\$115
PP42SO541	54	-	-	2.6	0.08	\$110
PP42SO481	48	-	-	2.4	0.08	\$105
PP42SO421	42	-	-	2.3	0.07	\$100
PP42SO361	36	-	-	2.1	0.06	\$95
PP42SO301	30	-	-	1.9	0.06	\$90
PP42SO241	24	-	-	1.7	0.05	\$82
PP42SO722	72	-	-	3.2	0.1	\$125
PP42SO662	66	-	-	3	0.09	\$120
PP42SO602	60	-	-	2.8	0.09	\$115
PP42SO542	54	-	-	2.6	0.08	\$110
PP42SO482	48	-	-	2.4	0.08	\$105
PP42SO422	42	-	-	2.3	0.07	\$100
PP42SO362	36	-	-	2.1	0.06	\$95
PP42SO302	30	-	-	1.9	0.06	\$90
PP42SO242	24	-	-	1.7	0.05	\$82
	PP42S0541 PP42S0481 PP42S0361 PP42S0361 PP42S0301 PP42S0241 PP42S0722 PP42S0662 PP42S0602 PP42S0542 PP42S0482 PP42S0482 PP42S0362 PP42S0302	PP42SO541 54 PP42SO481 48 PP42SO361 36 PP42SO361 30 PP42SO241 24 PP42SO241 24 PP42SO722 72 PP42SO662 66 PP42SO542 54 PP42SO482 48 PP42SO362 36 PP42SO362 36 PP42SO362 36 PP42SO362 36	PP42SO541 54 - PP42SO481 48 - PP42SO361 36 - PP42SO361 36 - PP42SO361 30 - PP42SO361 30 - PP42SO361 30 - PP42SO362 66 - PP42SO662 66 - PP42SO542 54 - PP42SO482 48 - PP42SO362 36 - PP42SO362 36 -	PP42SO541 54 - - PP42SO481 48 - - PP42SO421 42 - - PP42SO361 36 - - PP42SO362 66 - - PP42SO662 66 - - PP42SO542 54 - - PP42SO482 48 - - PP42SO482 42 - - PP42SO362 36 - - PP42SO362 36 - - PP42SO362 36 - -	PP42SO541 54 - - 2.6 PP42SO481 48 - - 2.4 PP42SO421 42 - - 2.3 PP42SO361 36 - - 2.1 PP42SO361 30 - - 1.9 PP42SO301 30 - - 1.9 PP42SO241 24 - - 1.7 PP42SO622 72 - - 3.2 PP42SO662 66 - - 3.8 PP42SO542 54 - - 2.6 PP42SO482 48 - - 2.3 PP42SO362 36 - - 2.3 PP42SO362 36 - - 2.1 PP42SO362 36 - - 2.1 PP42SO302 30 - - 1.9	PP42S0541 54 - - 2.6 0.08 PP42S0481 48 - - 2.4 0.08 PP42S0421 42 - - 2.3 0.07 PP42S0361 36 - - 2.1 0.06 PP42S0301 30 - - 1.9 0.06 PP42S0241 24 - - 1.7 0.05 PP42S0241 24 - - 3.2 0.1 PP42S0241 24 - - 3.09 PP42S0241 24 - - 3.09 PP42S0662 66 - - 3.09 PP42S0662 60 - - 2.8 0.09 PP42S0642 54 - - 2.6 0.08 PP42S0422 42 - - 2.3 0.07 PP42S0362 36 - - 2.1 0.06 PP42S0302 30 - - 1.9 0.06

Description		Model	Dimension			Weight	Volume	Unit	Glazed	HP
		Number	W	d	h	LB	FT ³	Price	MP/Door Option	Laminate Option
4-Wire Power System										
~		PP42D0721	72	-	-	3	0.1	\$144		
		PP42DO661	66	-	-	2.8	0.09	\$139		
	Ţ	PP42DO601	60	-	-	2.6	0.09	\$134		
	Circuit 1	PP42DO541	54	-	-	2.4	0.08	\$129		
No. 1	ö	PP42DO481	48	-	-	2.3	0.08	\$124		
		PP42DO421	42	-	-	2.1	0.07	\$119		
		PP42DO361	36	-	-	1.9	0.06	\$114		
		PP42D0722	72	-	-	3	0.1	\$144		
		PP42DO662	66	-	-	2.8	0.09	\$139		
	t 2	PP42DO602	60	-	-	2.6	0.09	\$134		
	Circuit 2	PP42DO542	54	-	-	2.4	0.08	\$129		
	с	PP42DO482	48	-	-	2.3	0.08	\$124		
		PP42DO422	42	-	-	2.1	0.07	\$119		
		PP42DO362	36	-	-	1.9	0.06	\$114		

Double Duplex Kit

Double duplex kit includes two Black plastic duplexes connected to harnesses. Male connection (IN) on one side with female connection (OUT) on the opposite for easy connect and disconnect. Conduit is wrapped in Black nylon sleeve. Actual length is 1" longer than nominal. Specify 'Circuit 1' or 'Circuit 2'. Both duplexes on the kit will be assigned to the same circuit.

Ideal for use with Bungee SL power / data management troughs; model # corresponds to the size of power / data management trough will fit on (i.e. P42D-48 will fit a JB48A, JB48L or JB48C module). Infeed required for connection to building power. Sold separately.

PP42J72	73	-	-	3	0.1	\$112	
PP42J66	67	-	-	2.9	0.09	\$90	
PP42J60	61	-	-	2.7	0.09	\$100	
PP42J54	55	-	-	2.5	0.08	\$94	
PP42J48	49	-	-	2.4	0.08	\$88	
PP42J42	43	-	-	2.2	0.07	\$82	
PP42J36	37	-	-	2	0.06	\$76	
PP42J30	31	-	-	1.8	0.06	\$70	
PP42J24	25	-	-	1.6	0.05	\$64	
PP42J18	19	-	-	1.4	0.04	\$58	

Power Harness Jumper

Male connection (IN) on one side with female connection (OUT) on the opposite for easy connect and disconnect. Conduit is wrapped in Black nylon sleeve. Actual length is 1" longer than nominal. Ideal for use with Bungee SL power / data management troughs. Use PP42J-18 between two power / data management troughs separated by Bungee SL wedge, keystone or half moon tables. Use all other sizes to jump between power kits on power / data management troughs that are NOT powered (i.e. use a PP42J-60 as a pass-through on a 60" wide non-powered table between POWERED power / data management trough modules. global

	4-Wire Power System PP42HW72	72	-
er Solutions	72" Multi-Circuit Hardwire Infeed 72" multi-circuit hardwire infeed (up to 20 AMPS per circuit), two regular circuits. Provides single power entry from floor or wall located by building power supply. Conduit is wrapped in black nylon sleeve. 72" extra flex conduit. Connects PP42SOxx1 or PP42DOxx2 Duplex kits. TO BE HARDWIRED BY LICENSED ELECTRICIAN. UL listed. Where liquid tight conduit is required, specify PP42HW82L.		
P o W	PP42HW82L	82	-
L.	4B Power Infeed w/72" Conduit 82" multi-circuit hardwire infeed (up to 20 AMPS per circuit), two regular circuits. Provides single power entry from floor or wall located by building power supply. With 10" extra flex conduit + 72" liquid tight conduit. Conduit is wrapped in black nylon sleeve. Connects PP42S0xx1 or PP42D0xx2 Duplex kits. TO BE HARDWIRED BY LICENSED ELECTRICIAN. UL listed.		
	PP42TP120	128	-
	PP42TP72 Single-Circuit 3-Prong Infeed	80	-
Z	Junction box included (to be mounted on underside of a table). Provides single power entry from floor or wall located building power supply. Conduit is wrapped in Black nylon sleeve. Allows for quick and easy disconnection from the wall. Available in 72" or 120" overall lengths, Black. Connects P42S or P42D kits. Power circuit 1 only. FOR HARDWIRED APPLICATIONS, INSTALLATION BY LICENSED ELECTRICIAN ONLY. UL listed.		
al CD	PP49TG	4.1	9.75
y Glob			
s™ b	Grommet Grommet cover with aluminum hinged access door.		
tion	PP511PT4W	5.9	11.81
vity Solutions™ by Global CDN			

Model Number

Dimension

Volume FT³

0.3

6.5 0.3

Weight LB

6.5

-

-

-

-

1.5

3.3

6.1

4.5

0.6 0.04

1.6 0.3

0.3

0.15

Unit Price

\$123

\$128

\$129

\$116

\$88

\$43

Glazed MP/Door Option

ΗP Laminate Option

Description

global

Table Power Trough

Productiv

998

Below worksurface power trough for use with PP49TG grommet. Provides cutout and below worksurface mounting of a single 4 wire duplex module and single telecom knock out. Tungsten finish only.

Description	Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option	glob
Power/Data and Voice/Data Blocks	PMSPDM	6.5	3.5	2.75	2	0.1	\$200			



Power/Data Block

Work surface power and data module with two power receptacles and and one telecom knockout. Telecom faceplate with two ports and two cat 5E jacks included separately. 9' Black cord. Remember to specify position for cutout in work surface. See diagram E1/E2/E3 for specification location. Black only.

PLCTM101B	9	5.5	-	6	0.3	\$276
PLCTM101T	9	5.5	-	6	0.33	\$276



Power/Data Block

Power only included, specify telecom options separately. See page 952. Includes two simplex outlets on top and one on bottom. 10' cord. Includes one telecom knockout. Available in Black (B) and Tungsten (T) indicated by last letter of product number. Surface access door.



PLCTM102B	12	5.5	-	5	0.67	\$336
PLCTM102T	12	5.5	-	5	0.67	\$336

4.3

4.3

6.8

6.8

11

11

11

11

PLRTM202B

PLRTM202T

0.67

0.67

0.67

0.67

4.7

4.7

7

7

\$361

\$361

\$420

\$420

Power/Data Block

Power only included, specify telecom options separately. See page 952. Includes four simplex outlets on top and one on bottom. 10' cord. Includes one telecom knockout. Available in Black (B) and Tungsten (T) indicated by last letter of product number. Surface access door.

PLRTM101B
PLRTM101T

Voice/Data Block

Power only included, specify telecom options separately. See page 952. Includes one duplex outlet on top and one on bottom. 10' cord. Includes one telecom knockout. Available in Black (B) and Tungsten (T) indicated by last letter of product number. Surface access door.



Voice/Data Block

Power only included, specify telecom options separately. See below. Includes two duplex outlets on top and one on bottom. 10' cord. Includes two telecom knockouts. Available in Black (B) and Tungsten (T) indicated by last letter of product number. Surface access door. S

ower Solution

പ

global		Model Di Number	imension w	d	V h	Veight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option
	Power/Data and Voice/Data Blocks									
		PM202USBB	11.02	6.77	-	7	0.67	\$520		
S		PM202USBT	11.02	6.77	-	7	0.67	\$520		
Power Solution	Power/USB Block Conference table power module with recessed dou AC power duplex (two receptacles), one USB dupl charging), two telecom knock outs and one simple 10' power cord. Box available in Black (B) or Tungsten (T) as indic character of model number. Duplexes finish White only. Cut out option U1, U2 or U3 to be specified when boardroom table.	lex (two USB x on the bottom; cated by last								
		PM101USBB	11.02	4.33	-	6	0.3	\$465		
		PM101USBT	11.02	4.33	-	6	0.3	\$465		
	Conference table power module with recessed do duplex (one receptacle and one USB charging), on out and one simplex on the bottom; 10' power cord Box available in Black (B) or Tungsten (T) as indic character of model number. Duplex finish White only. Cut out option K1, K2 or K3 to be specified when o boardroom table.	e telecom knock d. cated by last								
		PTEL01	-	-	-	0	0.05	\$160		
	БЕ БЕ Telecom Plate - 2 x 6 Includes 2 x RJ45 cat 6 data. Black telecom plate.									
CDN	I	PTEL02	-	-	-	0	0.05	\$235		
ductivity Solutions™ by Global CDN	Telecom Plate - 3 x 6									
۳ by	Includes 3 x RJ45 6 cat data. Black telecom plate.									
ions⊤		PTEL03	-	-	-	0	0.05	\$310		
Solut										
ity	Telecom Plate - 4 x 6 Includes 4 x RJ45 cat 6 data.									
tiv	Black telecom plate.									
duc										

Description	Model Di Number	mension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option	global
Power/Data and Voice/Data Blocks										
	PTEL04	-	-	-	0	0.05	\$260			
Telecom Plate - 3TSV Includes 1 x RJ45 cat 6 data, mini stereo and 15 pin HD VGA. Black telecom plate.										olutions
	PTEL05	-	-	-	0	0.05	\$365			
										ver S
Telecom Plate - 3SVH Includes mini stereo,15 pin HD VGA and HDMI. Black telecom plate.										Ром
Office Accessories										
	PEEPD	22.5	15	1.5	2	0.7	\$97			
Pencil Drawer Provides storage for writing instruments and sma worksurface. Attaches to the underside of the we included drawer slides. Black ABS plastic. 22.5"	orksurface with									
*17	PCOS3	25	25	60	8	14	\$138			
	PCOS2	25	25	60	8	14	\$138			
Metal Coat Tree Square tube metal frame. Four chromed double glides. 25"w x 25"d x 60"h. PCOS2 available in E PCOS3 available in Chrome only.										Z
	РСТ	25	25	65	6	3	\$170			
	1					č				ductivity Solutions™ by Global CDN
Solid Wood Coat Tree		Parula	d Specificat	ione	Ontional O	nonifications	Accessories avai	ilabla		lutie
Four satin brass double hooks. 25"w x 25"d x 60 Available in the following finishes. PLEASE SPE (ACM), Black (BKM), Medium Oak (MOO), Mapl (AHM), English Oak (EOM), Mahogany (TMM), Ha Fruitwood (TFM) and Walnut (TWM).	CIFY. Cherry e (AVM), Honey	Finish	u opecificat		optional S	pecifications	Accessories avai			tivity So:
										quc

global	Description	Model Number	Dimension w	d	h	Weight LB	Volume FT ³	Unit Price	Glazed MP/Door Option	HP Laminate Option
	Office Accessories									
		PEESL36	36	25	65.5	60	5.4	\$659		
		PEESL29	29	25	65.5	53	5.4	\$502		
Power Solutions	Whiteboard Easel Double-sided whiteboard for use with any dry era Available in 29"w or 36"w x 25"d x 65.5"h. Two Black (BLK) epoxy coated 18 gauge steel "A locking casters. PVC tray holds markers and erasers, also suitab presentation screen or privacy panel.	-Frame" legs wi	th 18	18	1.12	6	0.3	\$59		

Corner Keyboard Plate

Converts two 1 1/8" thick worksurfaces at 90° to one another into a keyboard support corner. 18"w x 18"d. Finished in Black (BLK) and Tungsten 2 (TU2) epoxy coating.

Required Specifications Optional Specifications Accessories available Finish